


# 23W

# SMART TUBE : T8

# W

Total Flux	2300lm
Efficiency	100lm/W $\pm$ 10%
Color Temperature	5500K $\pm$ 400
Power Consumption	23W $\pm$ 10%
Input Power	90~240Vac (45~65Hz)
PF (Power Factor)	>0.90
Color Rendering Index	70 $\pm$ 5%
Operation Temperature	-20~50°C
Storage Temperature	-40~80°C
Housing & Lampshade	PC + Al
Protection Rating	Indoor
Weight	325g
Working Life	>40,000 hrs
Figuration Size	$\Phi$ 26 X 1212mm

Eco-friendly product  
No Mercury, No Lead (RoHS standard)

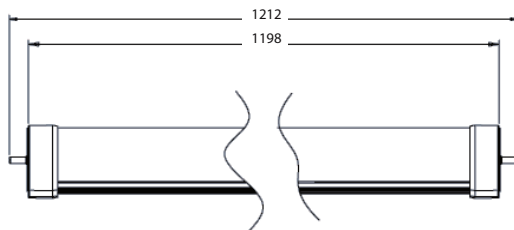

## LEDLITEK

246 Kumho-ri Buyong-myeon, Cheongwon-gun, Chungcheongbuk-do, Korea, 363-942  
Tel: +82-70-4331-3570 Fax: +82-43-263-3308